



300LB RF

NPS	L	d	D	D1	D2	b	f	n-Ød
2"	272	49	165	127	92	20.7	2	8-Ø19


Technical Specification

API 608	Design & manufacture standard
ASME B16.10	Face to face standard
ASME B16.5	Flange end dimension standard
API 598	Inspection & test standard

Nominal pressure	300LB
Strength test pressure	7.7
Seal test pressure	5.6
Air seal pressure	0.6
Max.temperature	-29- 120°C
Medium	Water.air.steam.gasetc

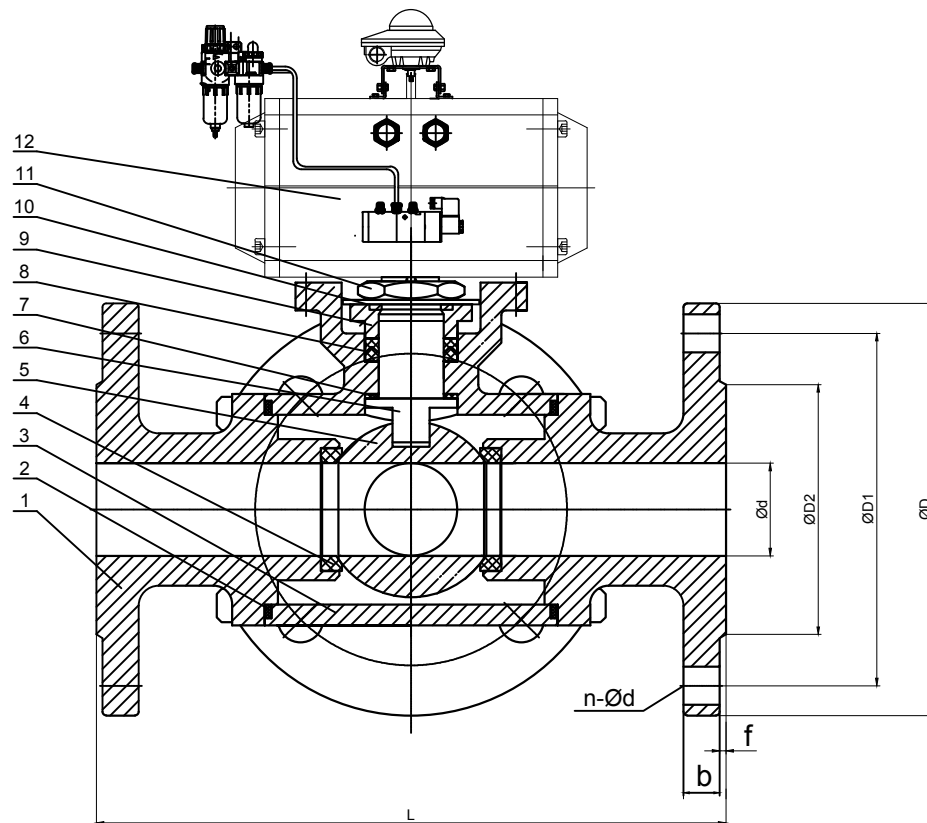

T TYPE

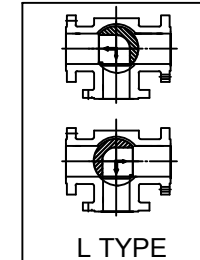

L TYPE

6	Stem	A182 F316	12	Pneumatic actuators	
5	Ball	A182 F316	11	Nut	A194 2H
4	Seat	RPTFE	10	Gasket	SS
3	Body	A216 WCB	9	Gland	A216 WCB
2	Gasket	PTFE	8	Packing	PTFE
1	Cap	A216 WCB	7	Thrust Washer	PTFE
NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL

3 Way Ball Valve

Construction

300LB RF

Page

1